


DOWEL REMOVAL


# ASSEMBLY INSTRUCTIONS

## TOOLS

---



NOTE: You will need a hammer, drill, and wood screw to successfully remove dowels.

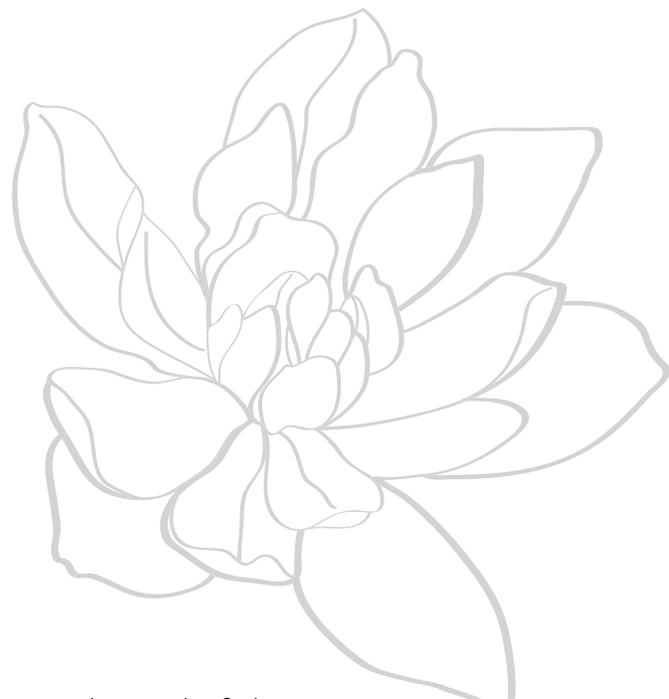


Thoughtful Design **MADE RIGHT**

## INSTRUCTIONS

---


### STEP 1

Drill a 1/8" pilot hole into the tip of each dowel. Drill to a depth of 1/2".

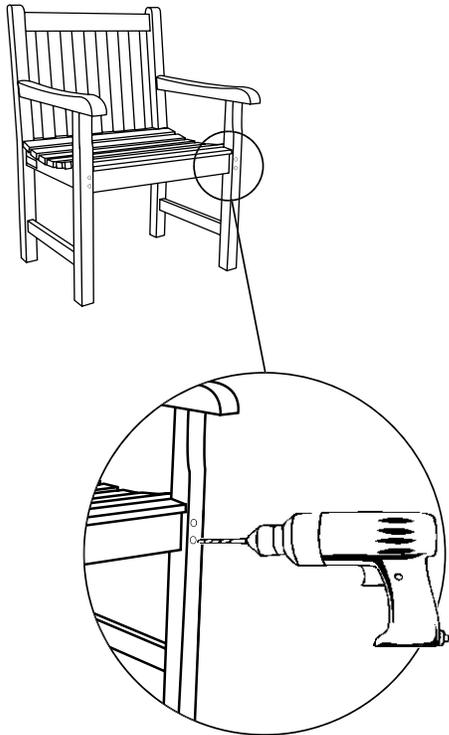

### STEP 2

Using a screw from the bottom of the seat or from the hardware pack, drive the screw into the end of the dowel as shown. You should drive the screw at least half of the way into the dowel.

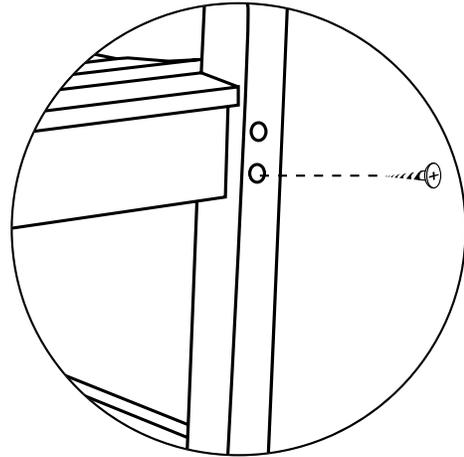

### STEP 3

Then using a claw hammer, pry out the dowel like you would a nail. Repeat this process for each dowel that must be removed.

